


# U-BEUGELS MET ISOLATIE | ETRIERS EN U ISOLATION

Thermisch verzinkt - Verkrijgbaar in RVS 304 en RVS 316  
Galvanisé à chaud - Disponible en INOX 304 et INOX 316

• Geschikt voor agressieve milieus  
• Adapté aux environnements agressifs



U-beugels met isolatie • Etriers en U isolation

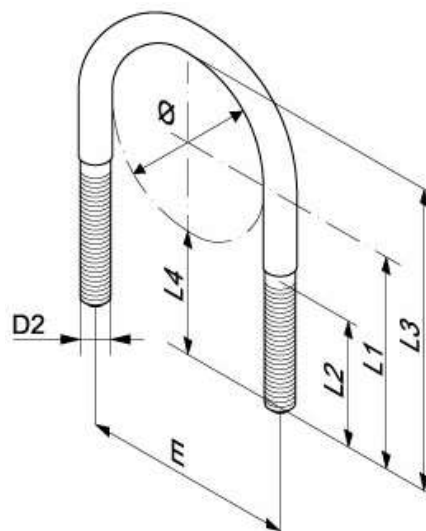

| ART N°               | Ø   | D      | DN  | M  | E   | L1  | L2  | L3  | L4 |
|----------------------|-----|--------|-----|----|-----|-----|-----|-----|----|
| KRAMBF148THVZD22M8   | 22  | 1/2"   | 15  | 8  | 31  | 70  | 60  | 81  | 59 |
| KRAMBF148THVZD27M8   | 27  | 3/4"   | 20  | 8  | 36  | 70  | 60  | 83  | 56 |
| KRAMBF148THVZD34M8   | 34  | 1"     | 25  | 8  | 43  | 70  | 60  | 87  | 53 |
| KRAMBF148THVZD42M10  | 42  | 1 1/4" | 32  | 10 | 54  | 72  | 60  | 93  | 51 |
| KRAMBF148THVZD48M10  | 48  | 1 1/2" | 40  | 10 | 60  | 76  | 65  | 100 | 52 |
| KRAMBF148THVZD60M10  | 60  | 2"     | 50  | 10 | 72  | 82  | 65  | 112 | 52 |
| KRAMBF148THVZD76M12  | 76  | 2 1/2" | 65  | 12 | 90  | 97  | 75  | 135 | 59 |
| KRAMBF148THVZD89M12  | 89  | 3"     | 80  | 12 | 104 | 102 | 75  | 146 | 57 |
| KRAMBF148THVZD102M12 | 102 | 3 1/2" | 90  | 12 | 117 | 108 | 75  | 159 | 57 |
| KRAMBF148THVZD114M12 | 114 | 4"     | 100 | 12 | 130 | 114 | 75  | 171 | 57 |
| KRAMBF148THVZD140M12 | 140 | 5"     | 125 | 12 | 156 | 126 | 75  | 196 | 56 |
| KRAMBF148THVZD168M16 | 168 | 6"     | 150 | 16 | 188 | 155 | 95  | 239 | 71 |
| KRAMBF148THVZD220M16 | 219 | 8"     | 200 | 16 | 240 | 181 | 95  | 290 | 71 |
| KRAMBF148THVZD273M20 | 273 | 10"    | 250 | 20 | 298 | 212 | 100 | 348 | 75 |
| KRAMBF148THVZD324M20 | 324 | 12"    | 300 | 20 | 349 | 245 | 110 | 407 | 83 |

Zonder moeren of sluitringen (wel verkrijgbaar)  
Sans écrous et rondelles (disponible)